

ESCAVEYORS


mit-mol Escaveyor are ideal for moving loads up to 1500kgs. vertically between two or more levels. Utilizing a top mounted geared motor the speed can be varied depending upon the capacity need. Positioning and over-travel limit switches assure proper conveyor positioning all the time. We can design, product movement configurations in Z Flow, C Flow, Right Angle Flow -- combination and can be reversible. All our Escaveyors are safely enclosed and Features include product sensing photoeye, safety tunnels at entry and exit points, fully guarded / & protected frames, II units ship completely assembled and prewired with all devices tied into a terminal strip in a junction box. Full PLC controls are available upon request.

➤ LIGHT DUTY ESCAVEYOR- LOADS UPTO 50KGS


➤ MEDIUM DUTY ESCAVEYOR- LOADS UPTO 200KGS



ECO- Non Continuous TYPE

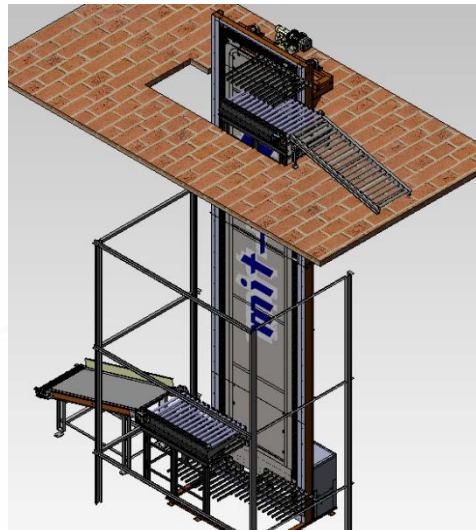

Continuous TYPE

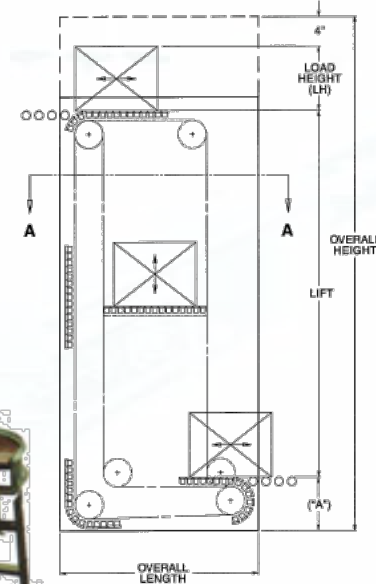

➤ HEAVY DUTY LOADS UPTO 1500KGS / PALLET ESCAVEYOR-NON CONTINUOUS TYPE

